

Brodica Picaro proizvodi se u tri osnovna modela, Picaro 20 SD, Picaro 20 WA i Picaro 20 OB koji se prvenstveno razlikuju po vrsti pogona i kabini. Modeli WA i OB su predviđeni za ugradnju vanbrodskog motora do 150 HP-a, WA nema kabine dok modeli OB i SD je imaju s time da SD pogoni unutrašnji motor od 135 HP-a.

The sport boat Picaro is produced in three basic models, Picaro 20 SD and Picaro 20 WA and Picaro OB which are primarily differentiated by engine type and cabin. An outboard engine with up to 150 HP can be mounted on WA and OB models, the WA model has no cabin, while OB and SD models both have cabins with the SD model having and inboard 135 HP engine.



Standardna oprema

- trup bijele boje
- inox ograda
- inox bitve
- aluminijski bokoštitnik s gumenim umetkom
- bokaporte
- vrata i poklopac spremnika konzole (kabine)
- vjetrobransko staklo sa inox zaštitom
- volan sa sajlom
- kompas
- spremnik goriva sa pokazivačem
- sidreni koloturnik i blokada lanca
- navigacijska svjetla
- automatska kaljužna pumpa
- električna instalacija
- instrument ploča sa prekidačima
- krmene ljestve

Standard Features


- white hull
- stainless steel hand rail
- stainless steel cleats
- aluminium rubrail with rubber insert
- hatches
- console locker (cabin) door and top cover
- windshield with stainless steel frame
- steering wheel with cable
- compass
- fuel tank with fuel indicator
- anchor windlass and blocate chain
- navigation lights
- automatic bilge pump
- electrical installations
- control panel with switches
- Stern Boarding Ladder

Dodatna oprema

- različita boja trupa i palube
- bitve po želji
- podna svjetla
- inox ograda po projektu ili izboru
- rolbar
- ljetna tenda
- zimska tenda
- el. podizač sidra 500 W
- spremnik vode 80 lit
- tuš sa pumpom i filterom
- personalizirana instrument ploča
- sirena
- CD radio sa zvučnicima
- teak cockpit i platforma (SD)
- teak paluba (WA)
- stol (WA)
- pramčano sunčalište (WA)
- hladnjak
- priključak i punjač 220 V

Optional Equipment

- custom hull and deck colour
- custom made cleats
- floor lights
- custom made stainless steel hand rail
- roll bar
- summer canvas
- winter canvas
- electrical anchor winch 500 W
- water tank 80 lit
- shower with pump and filter
- custom made control panel
- horn
- CD player with speakers
- teak cockpit and swim platform (SD)
- teak deck (WA)
- table (WA)
- bow sundeck (WA)
- fridge
- 220 V fitting with battery charger



MARSERVIS d.o.o.

Kaštelir 135, 52464 Kaštelir, Hrvatska-Croatia

Direktor: +385 98 254 903

Uprava - tel: +385 52 758 150, fax: +385 52 726 212

PJ. Proizvodnja - tel: +385 52 455 580, fax: +385 52 455 551

www.marservis.hr e-mail:info@marservis.hr



water instinct



GRAFICA WALTER UMAG



Tvrtka Marservis je osnovana 1995. godine kao servis za plovila, a svoje poslovanje proširuje sedam godine kasnije s proizvodnjom sportskih brodica.

Naša vizija je unapređenje nautičke proizvodnje i prilagođavanje naših projekata uživanju u svim trenucima plovidbe.

Naša tri glavna proizvoda, brodice Picaro 20 SD, Picaro 20 WA i Picaro 20 OB inspirirana su dinamikom mora i snagom bure, a oblikovana su dugogodišnjim iskustvom i modernim saznanjima u nautičkoj industriji.

The company Marservis was founded in 1995 as a boat repair service. Seven years later, Marservis expanded its business activities to include the production of sport boats. Our vision is to improve the nautical production and to adapt our projects to the enjoyment of cruising.

Our three main products, boats Picaro 20 SD, Picaro 20 WA and Picaro 20 OB are inspired by the dynamics of the sea and the strength of the winds. They are designed with our longtime experience and our up to date knowledge of the nautical industry.






Test sa motorom 140 HP - Test with engine 140 HP

Propeler Al Aluminum propeller	19 Inch
Posada članova Crew members	2
Vrijeme glisiranja Time to plane	2 sec.
Brzina glisiraja Planing speed	13 čvora/knots
Putna brzina Cruising speed	24 čvora/knots

Okretaj motora Engine RPM	Min.	1000	2000	3000	4000	5000	5800
Brzina u čvorovima Speed in knots	2,6	3,8	6,4	13	26	34	38

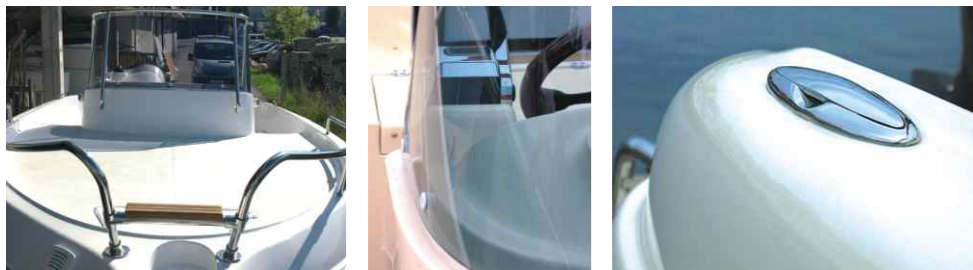

Test sa motorom 135 HP - Test with engine 135HP

Propeler Al Aluminum propeller	19 Inch
Posada članova Crew members	2
Vrijeme glisiranja Time to plane	3 sec.
Brzina glisiraja Planing speed	16 čvora/knots
Putna brzina Cruising speed	24 čvora/knots

Okretaj motora Engine RPM	Min.	2000	2700	3000	4000	5200
Brzina u čvorovima Speed in knots	3,00	4,7	8,2	16	22	36



Test sa motorom 90 HP - Test with engine 90 HP

Propeler Al Aluminum propeller	19 Inch
Posada članova Crew members	2
Vrijeme glisiranja Time to plane	4 sec.
Brzina glisiraja Planing speed	15 čvora/knots
Putna brzina Cruising speed	22 čvora/knots

Okretaj motora Engine RPM	Min.	1000	2000	3000	3200	4000	5200
Brzina u čvorovima Speed in knots	2,8	3,8	6,3	11,7	15	22,3	32



Dužina preko svega Length overall	5,99 m	
Dužina na vodenoj liniji Waterline length	4,83 m	
Širina preko svega Width overall	2,22 m	
Širina na vodenoj liniji Waterline width	2,00 m	
Gaz Draft	0,32 m	
Visina iznad vodene linije Height above waterline	1,60 m	
Težina bez motora Weight without engine	680 kg	
Max. snaga motora Maximum HP engine	150 HP	
Spremnik goriva Fuel tank	WA OB SD	100 l 90 l 160 l
Spremnik vode (opcija) Water tank (optional)		80 l
Visina boka Cockpit height		0,67 m
Materijal gradnje Hull GRP		Stakloplastika, GRP
Max. broj osoba Maximum Person Capacity		6
Trup Hull		V
Kategorija Category		C
Certifikat Certification		CE, HRB

Tehnički podatci
Specification

